

PRO3000

2-DOOR INTELLIGENT CONTROLLER

SYSTEM OVERVIEW


The PRO3000 IP-enabled controller is an advanced access control panel capable of providing solutions for medium to large applications. The PRO3000 provides power and flexibility with its 32-bit CPU architecture, TCP/IP protocol support, flash memory for firmware and large local card holder database.

The PRO3000 is designed to operate off-line, making access control decisions independently from a PC or other controlling device. It can also be connected to a host computer for system configuration, alarm monitoring and direct control. Connectivity to the host computer is accomplished via TCP/IP network connection.

The PRO3000 combines intelligent controller and reader interface into one complete unit. It connects for two readers via Wiegand controlling two doors. The controller can support up to 62 doors via RS485 multi-drop communication where 30 downstream controllers are connected to the gateway controller. This architecture can reduce the usage on LANs by using only one TCP/IP address to 62 doors.

The PRO3000 accommodates a card database of 100,000 cards, and a transaction buffer of 100,000 transactions.

The PRO3000 is designed with tile mounting configuration.

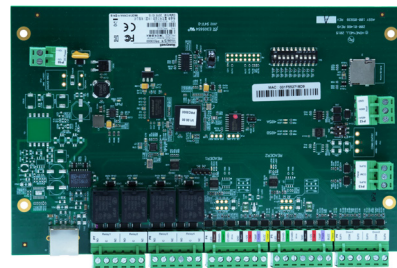

FEATURES

Database:

- Cardholder capacity: 100,000
- Transaction storage: 100,000
- Flash programming for firmware revision updates
- Access level: 128
- Holidays 255
- Time zone: 12
- Card reader formats: 128 Wiegand
- Format support
 - Credential facility codes: 8
 - Dedicated tamper alarm
 - Dedicated power fail alarm
 - Real time clock
 - Geographic time zone support
 - Leap year support
- Embedded web server to configure network attributes

Environment:

- Temperature 0 to 50° C operational;

-55 to 85° C storage

- Humidity: 0 to 85% RHNC

Communication:

- Ethernet port connected to TCP/IP network as master panel
- RS485 multi-drop connection - or downstream panels

Onboard I/O:

- 2 Readers, expandable to 62 readers per gateway controller
- 8 Supervised inputs
- 4 Relay outputs

Operational Functionality:

- Operational modes
 - Card only
 - Card and PIN
- Maximum site codes: 8 digit
- Anti-Passback support:
 - Local

- Global
- Forgiveness
- Interlocks: 256

- Duress alarm

Dimensions:

- 152mm W x 229mm

Approvals:

- CE/ CC

Recommended Readers:

Smart Card Readers:

JT-MCR Mifare CSN Readers
HON-MSR Mifare Sector Readers
OmniClass Readers
HID iClass Readers


Proximity Readers:

OmniProx Readers HID Proximity

Biometrics Readers:

HON-FIN4000 Fingerprint Bioscript

System Diagram

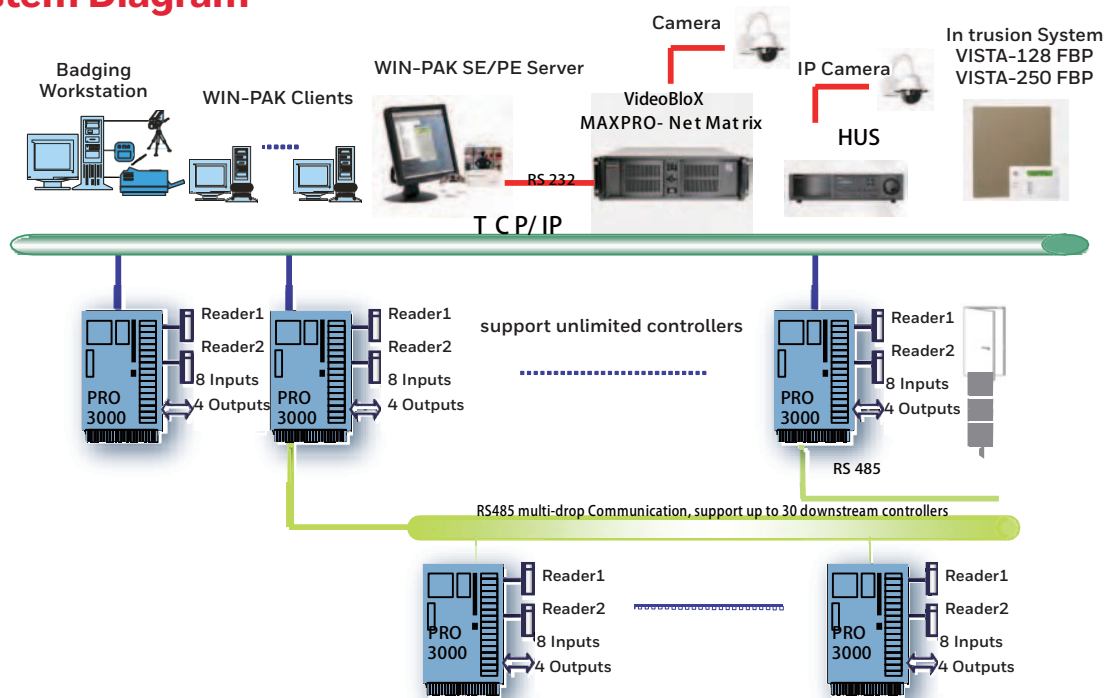

Benefits

More IT-friendly

Onboard Ethernet port allows seamless connection to TCP/IP

Bigger Databases

Cardholder capacity of 100,000 and transaction storage of 100,000

- True 32-bit microprocessor provides fast transaction processing for the most demanding network applications
- CP/IP-based distributed hardware architecture allows for economic system installation
- Flash memory allows new versions of firmware to be downloaded from the host computer to the controller(s) through the central network

Easier to Deploy

Integrated hardware structural design simplifies installation

More Secure

Distributed architecture makes risk of failure highly

- Large, local controller database allows access control decisions to be made by controller in real time without the need to communicate to the server
- Scalable architecture ensures optimal performance with a seamless upgrade path to accommodate future growth beyond initial installation

Ordering

PRO3000

PRO3000 2-door intelligent Controller

For more information,

<https://honeywellbuildings.in>

Call: 1-800-103-0339

Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122 002

www.honeywell.com

© 2020 Honeywell International Inc.

PRO3000
2-DOOR INTELLIGENT
CONTROLLER

Honeywell